


MOTORE DIESEL MOTORE ELETTRICO	DIESEL ENGINE ELECTRIC MOTOR	DIESELMOTOR ELEKTROMOTOR	MOTEUR DIESEL MOTEUR ELECTRIQUE	20 kW 220V-2,2kW 380V-5,5kW
PENDENZA MAX VELOCITA' MAX ROTAZIONE TORRETTA NAVICELLA AEREA ROTAZIONE NAVICELLA PORTATA UTILE PESO LARGHEZZA MINIMA	MAX SLOPE MAX SPEED TURNTABLE SLEWING AERIAL CAGE CAGE ROTATION SAFE WORK. LOAD WEIGHT MIN. STOWED WIDTH	MAX STEIGFAHIGKEIT MAX GESCHWINDIGKEIT DREHTURM ROTATION ARBEITSKORB KORB ROTATION ZULADUNG GEWICHT MIN. BREITE	PENTE MAXI VITESSE MAXI ROTATION TOURELLE NACELLE ORIENTATION NACELLE CHARGE UTILE POIDS LARGEUR MIN.	40% 2 KM/H APPR 360° CONT. 2.4 x 0.8/0.9 m. 80°+ 80° 200 KGS 9.300 KGS 1,7 m.

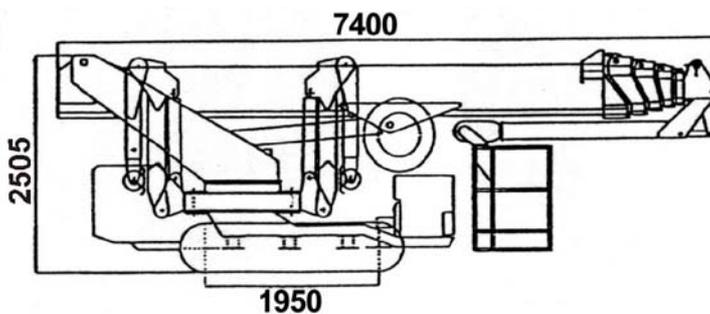

Palazzani Industrie SpA

25050 PADERNO F.C. (BS) - ITALIA
 Tel ++ 39 030 6857073 - Fax ++ 39 030 657079
 mail: platforms@palazzani.it
 url: www.palazzani.it

Caratteristiche e dati tecnici sono puramente informativi e soggetti a variazione senza preavviso.
 Characteristics and technical data are informative only and subjected to change without notice.

